
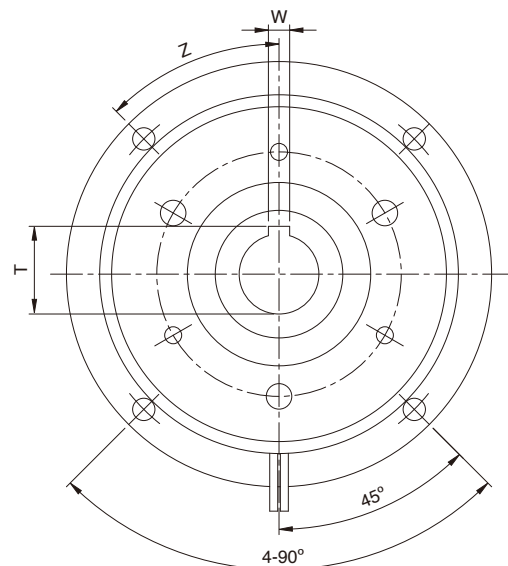
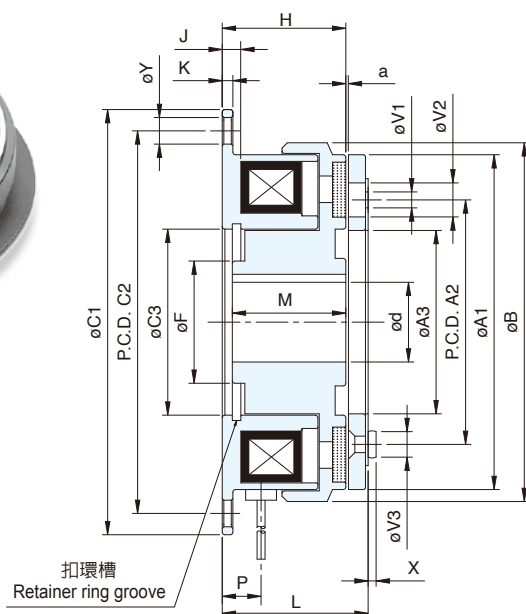


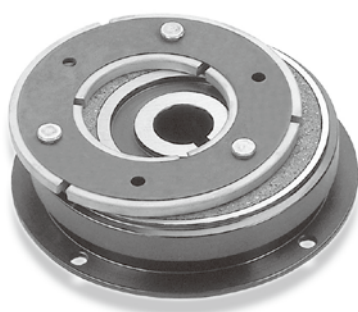

型 號	MODEL	CDF0S6AA(AB)	CDF1S5AA(AB)	CDF2S5AA(AB)	CDF005AA(AB)	CDF010AA(AB)	CDF020AA(AB)	CDF040AA(AB)
靜 扭 力 Static Friction Torque	Nm	5.5	11	22	45	90	175	350
動 扭 力 Dynamic Friction Torque	Nm	5.0	10	20	40	80	160	320
功率 Power [24V](W) at 20°C		11	15	20	25	35	45	60
外 型 尺 寸 Exterior dimensions	A1	63	80	100	125	160	200	250
	A2	46	60	76	95	120	158	210
	A3	34.5	41.8	52	62	80	99.5	125
	B	67.5	85	106	133	169	212.5	264
	C1	80	100	125	150	190	230	290
	C2	72	90	112	137	175	215	270
	C3	35	42	52	62	80	100	125
	d(H7)	15 (12)	20 (15)	25 (20)	30 (25)	40 (30)	50 (40)	60 (50)
	F	23(21)	28	40	45	62	77	100
	V1	3-3.1	3-4.1	3-5.1	3-6.1	3-8.1	3-10.2	4-12.2
	V2	3-6.3	3-8	3-12	3-12.5	3-15	3-17.3	4-20.8
	V3	3-6	3-6	3-7.5	3-9.8	3-13	3-18	4-23
	Y	5	6	7	7	9.5	9.5	11.5
	Z	6-60°						8-45°
	H	24	26.5	30	33.5	37.5	44	51
	J	3.5	4.3	5	5.5	6	7	7.85
	K	2	2.5	3	3.5	4	5	6
	L	28.05	31.3	35.9	40.5	47	56.2	64.47
	M	22	24.1	27	30	34	40.15	47.15
	P	7.5	8.5	8.9	9.5	9.5	10.5	15.5
	X	1.5	1.4	1.7	2	2.5	5.7	6.4
	a	0.2 (±0.05)			0.3 (+0.05/-0.1)		0.5 (0/0.2)	
	W	5 (4)	5 (5)	7 (5)	7 (7)	10 (7)	12 (10)	15 (12)
	T	17.3(13.8)	22.3(17.3)	28.3(22.3)	33.3(28.3)	43.8(33.3)	53.8(43.8)	65.3(53.8)
重量 Weight	(kg)	0.46	0.83	1.5	2.76	5.1	9.3	17
保護素子 Protective device		07D470K			10D680K	14D680K		20D680K