


附軸承導座 with bearing mounted hub

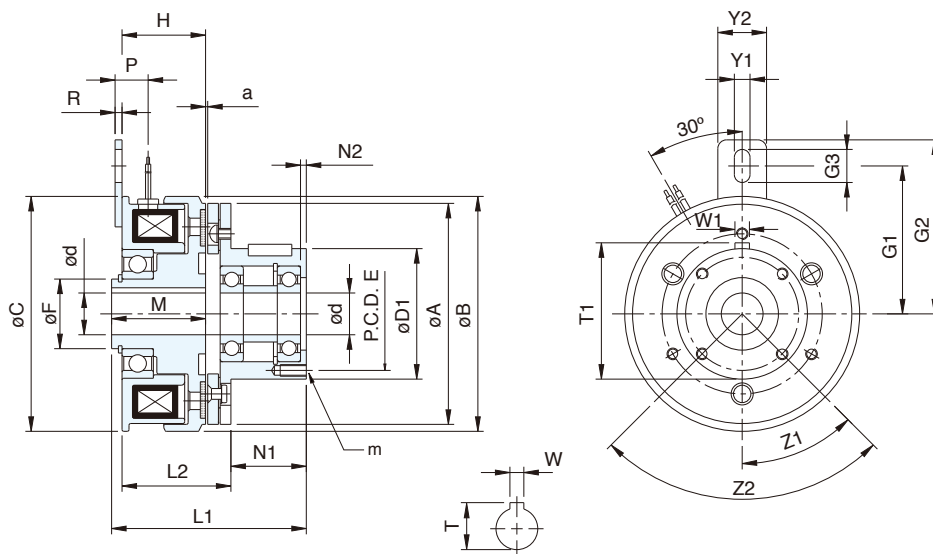

型 號 MODEL		CE20S6AA	CE21S5AA	CE22S5AA	CE2005AA	CE2010AA
靜 摩 擦 扭 力 (Nm) Static Friction Torque		5.5	11	22	45	90
動 摩 擦 扭 力 (Nm) Dynamic Friction Torque		5.0	10	20	40	80
功率 Power [24V](W) at 20°C		11	15	20	25	35
外 型 尺 寸 Exterior dimensions	A	63	80	100	125	160
	B	67.5	85	106	133	169
	C	67.5	85	106	133	169
	d(H7)	12	15	20	25	30
	E	33	37	47	52	62
	F	20	25	30	40	50
	H	24.6	27	30	33.5	38.9
	L1	54.65	63.25	74.9	91	109.7
	L2	32.15	35.75	40.9	46.8	55.4
	M	27.1	29.5	34	37.7	43.2
	N1	20	25	30	40	50
	N2	2	2.5	3	2	3
	P	9.5	9.5	9.6	9.6	11.5
	R	2	2	2	2	3
	D1(js6)	38	45	55	64	75
	a	0.2 (±0.05)			0.3 (^{+0.05} _{-0.1})	
	G1	42.75	55.25	61.75	76.3	98.35
	G2	49.50	63.5	72.5	85	112
	G3	9.5	10.5	11.5	11.4	18.5
	T1	39.5	47	57	67	78
	W1	4	5	5	7	7
	Y1	4.5	5.5	6.5	6.4	8.5
	Y2	12	14	16	16	25
	Z1	0°		45°		30°
	Z2	3-120°		4-90°		6-60°
W	4	5	5	7	7	
T	13.8	17.3	22.3	28.3	33.3	
m	3-M4x6		4-M4x8		6-M5x8	
重量 Weight (kg)		0.7	1.23	2.18	3.93	7.1
保護素子 Protective device		07D480K			10D680K	14D680K