


CF2 Series

乾式單板電磁離合器-法蘭固定型 Electromagnetic Power-Applied Friction Clutch - Flange Mounted

附軸承導座 with bearing mounted hub

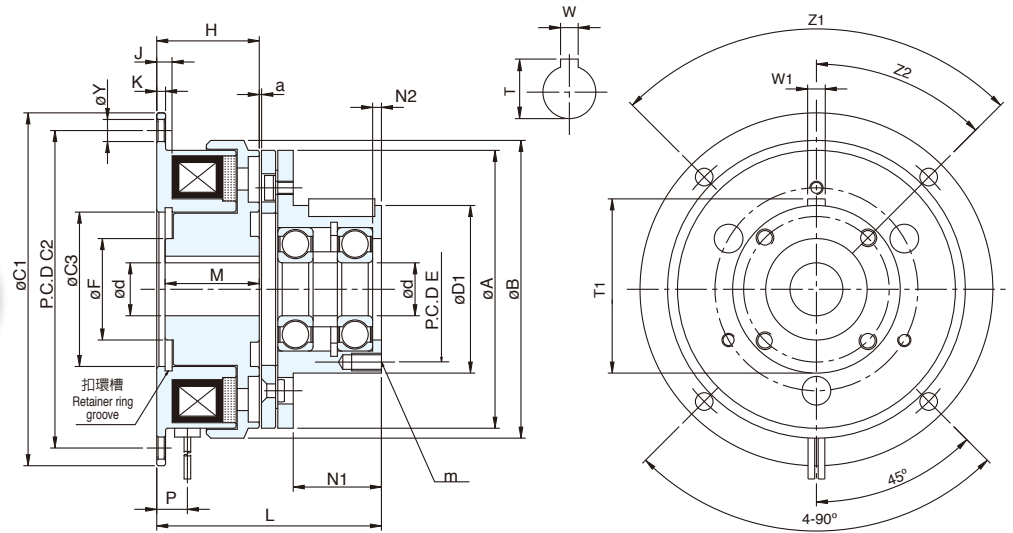

型 號 MODEL	CF20S6AA	CF21S5AA	CF22S5AA	CF2005AA	CF2010AA	CF2020AA	CF2040AA
靜 扭 力 (Nm) Static Friction Torque	5.5	11	22	45	90	175	350
動 扭 力 (Nm) Dynamic Friction Torque	5.0	10	20	40	80	160	320
功率 Power [24V](W) at 20°C	11	15	20	25	35	45	60
外型尺寸 Exterior dimensions	A	63	80	100	125	160	250
	B	67.5	85	106	133	169	264
	C1	80	100	125	150	190	290
	C2	72	90	112	137	175	270
	C3	35	42	52	62	80	125
	d(H7)	12	15	20	25	30	50
	E	33	37	47	52	62	101.5
	F	23	28	40	45	62	100
	D1(j6)	38	45	55	64	75	115
	T1	39.5	47	57	67	78	118.5
	Y	5	6	7	7	9.5	11.5
	H	24	26.5	30	33.5	37.5	51
	J	3.5	4.3	5	5.5	6	8
	K	2	2.5	3	3.5	4	6
	L	51.55	60.3	70.9	86.8	104	145.5
	M	22	24.1	27	30	34	47.15
	N1	20	25	30	40	50	70
	N2	2	2.5	3	2	3	6
	P	7.5	8.5	8.9	9.5	9.5	15.5
	W1	4	5	5	7	7	12
	Z1	3-120°		4-90°		6-60°	4-90°
	Z2	60°	60°	45°	45°	30°	225°
	m	3-M4x4	3-M4x6	4-M4x8		6-M5x8	8-M6x12
	a	0.2 (±0.05)			0.3 (+0.05/-0.1)		0.5 (0/-0.2)
	W	4	5	5	7	7	12
	T	13.8	17.3	22.3	28.3	33.3	53.8
重量 Weight (kg)	0.66	1.19	2.11	3.8	6.9	13	23.6
保護素子 Protective device	07D470K			10D680K	14D680K		20D680K