
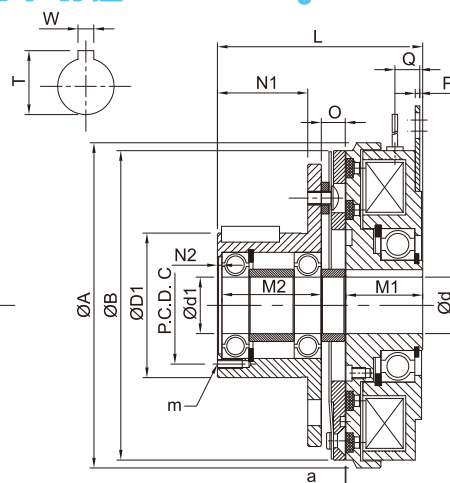
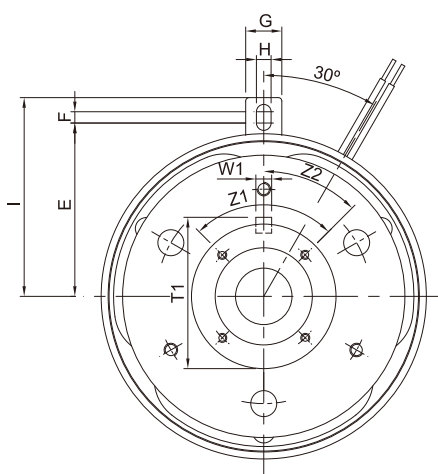


CJ2 Series

乾式單板標準超薄型電磁離合器 Electromagnetic Bearing - Mounted Clutch

附軸承導座 with bearing mounted hub

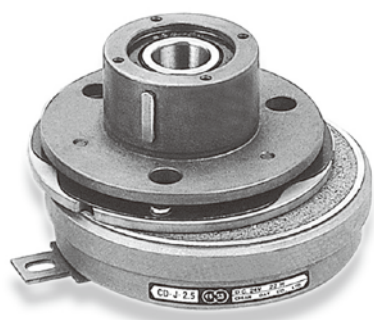

型號 MODEL		CJ20S6AA	CJ21S5AA	CJ22S5AA	CJ2005AA	CJ2010AA	CJ2020AA
靜摩擦轉距 [N · m] Static Friction Torque		5.5	11	22	45	90	175
動摩擦轉距 [N · m] Dynamic Friction Torque		5.0	10	20	40	80	160
功率 Power [24V](W) at 20°C		14	22	26	29	37	44
外型尺寸 Exterior dimensions	A	74	93	116	144	178	225
	B	70	88	110	137	172	217
	C	33	37	47	52	62	74.5
	d(H7)	12	15	20	25	30	40
	d1(H7)	12	15	20	25	30	40
	E	39.8	56	61.5	76.8	99	117
	F	5	5	4.3	5	10	10
	I	49	66	72	88	117.5	135.5
	D1(js6)	38	45	55	64	75	90
	G	12	14	16	16	25	25
	H	4.5	5.5	6.5	6.5	8.5	8.5
	L	54.7	63.3	73.7	90.8	112.8	134
	M1	25	26.5	30	34	43	50
	M2	21.5	26.5	32	44	54	63
	N1	20	25	30	40	50	60
	N2	2	2.5	3	2	3	5
	O	6	7.1	8.5	10.6	12.5	15.7
	P	2	2	2	2	3	3
	Q	8	9	9.5	11	15	18
	W	4	5		7		10
	T	13.8	17.3	22.3	28.3	33.3	43.8
	Z1	3-120°		4-90°		6-60°	4-90°
	Z2	60°		45°		30°	45°
	a	0.2 (±0.05)			0.3 (^{+0.05} _{-0.1})		0.4 (±0.1)
	W1	4	5		7		10
	T1	39.5	47	57	67	78	93.5
	m	3-M4x4	3-M4x6	4-M4x8		6-M5x8	4-M6x12
重量 (kg)		0.8	1.3	2.4	4.2	8.3	15.6
保護素子 Protective		07D470K			10D680K	14D680K	