
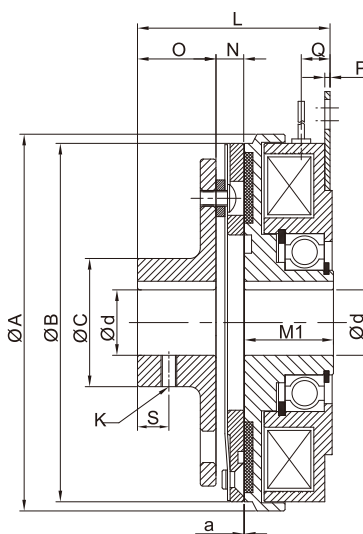


CJ1 Series

乾式單板標準超薄型電磁離合器 Electromagnetic Bearing - Mounted Clutch

附導座 with hub

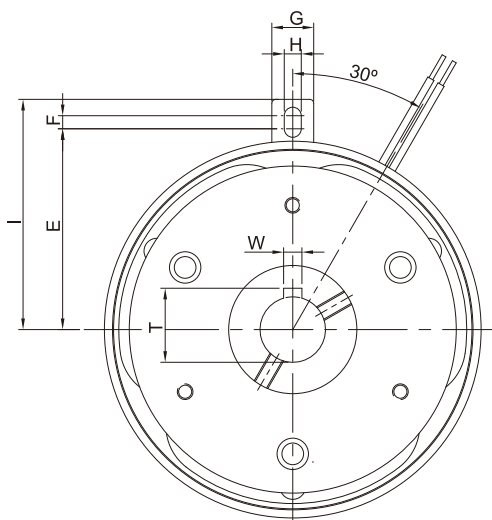

型號 MODEL		CJ10S6AA	CJ11S5AA	CJ12S5AA	CJ1005AA	CJ1010AA	CJ1020AA
靜摩擦轉距 [N · m] Static Friction Torque		5.5	11	22	45	90	175
動摩擦轉距 [N · m] Dynamic Friction Torque		5.0	10	20	40	80	160
功率 Power [24V](W) at 20°C		14	22	26	29	37	44
外型尺寸 Exterior dimensions	A	74	93	116	144	178	225
	B	70	88	110	137	172	217
	C	27.5	31	41	49	65	83
	E	39.8	56	61.5	76.8	99	117
	F	5	5	4.3	5	10	10
	G	12	14	16	16	25	25
	H	4.5	5.5	6.5	6.5	8.5	8.5
	I	49	66	72	88	117.5	135.5
	K	2-M5×150°	2-M5×150°	2-M6×150°	2-M6×150°	2-M8×150°	2-M8×120°
	L	46.2	54.3	63.7	74.8	93.8	111
	M1	25	26.5	30	34	43	50
	O	15	20	25	30	38	45
	N	6	7.1	8.5	10.6	12.5	15.7
	P	2	2	2	2	3	3
	Q	8	9	9.5	11	15	18
	S	6	8	10	12	14	18
	d(H7)	12	15	20	25	30	40
	W	4	5		7		10
	T	13.8	17.3	22.3	28.3	33.3	43.8
	a	0.2 (±0.05)			0.3 $\begin{smallmatrix} +0.05 \\ -0.1 \end{smallmatrix}$		0.4 (±0.1)
重量 (kg)		0.6	1.1	2	3.4	7	12.9
保護素子 Protective		07D470K			10D680K	14D680K	