



MWJ Series

標準濕式多板離合器 Oil Actuated Multi-disc Electromagnetic Clutch

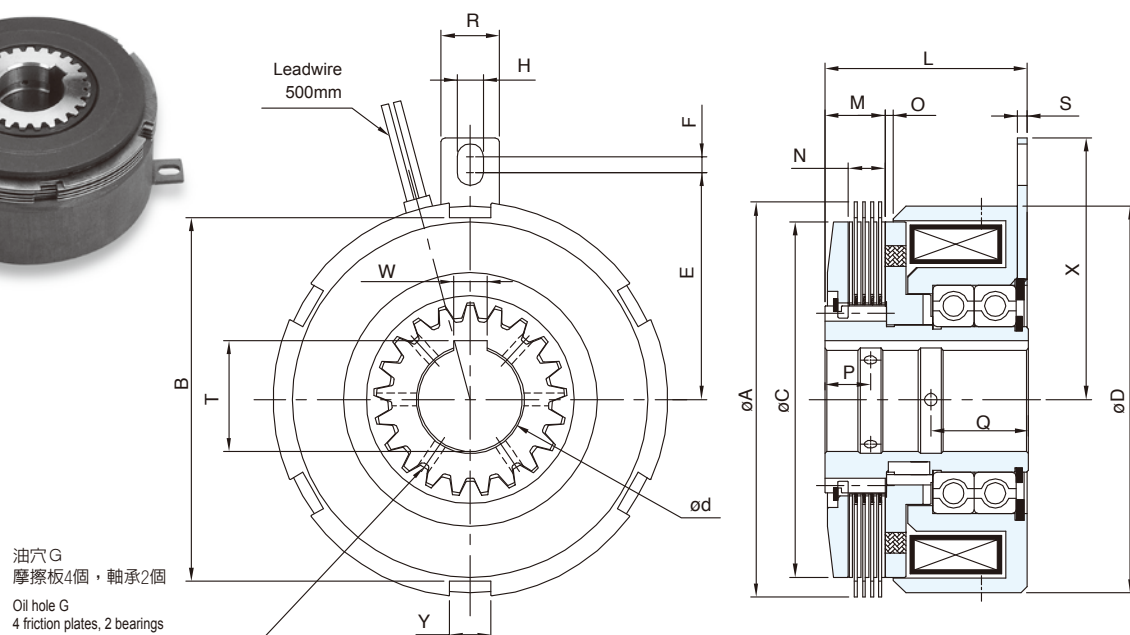

型 號 MODEL		MWJ1S2AA	MWJ2S5AA	MWJ005AA	MWJ010AA	MWJ020AA
靜 扭 力 Static Friction Torque	(Nm)	25	50	100	200	400
動 扭 力 Dynamic Friction Torque	(Nm)	12	25	50	100	200
功率 Power	[24V](W) at 20°C	12	17	22	48	51
外 型 尺 寸 Exterior dimensions	A	80	95	112	132	157
	B	73.4	87.5	103	122	145
	C	71	85.5	101	120	142
	D	78	93	110	130	155
	E	47	56.5	62.5	77	91
	F	2.7	3.7		4.5	5.5
	G	2	3			
	H	6.3			6.5	
	X	53	63	69	85.5	99.5
	L	45	49	57	63	78
	M	13	14.5	17.7	21.1	26.6
	N	8.3	8.8	12.2	14	
	O	2.5	2	1.2	1.4	2.5
	P	10	11	12.5	14	20.5
	Q	21.5	23.5	27.5	23.7	31
	R	12	14		16	
	S	2	2.3		3	
	Y	9	10		12	
	d(H7)	20	25	30	40	50
	W	6	8		12	14
	T	21.7	26.7	32.5	42.5	52.5
重量 Weight	(kg)	1.4	2.0	3.0	4.8	7.7
保護素子 Protective device		GD80KD10		GD80KD14		

連接板 Connecting Plate

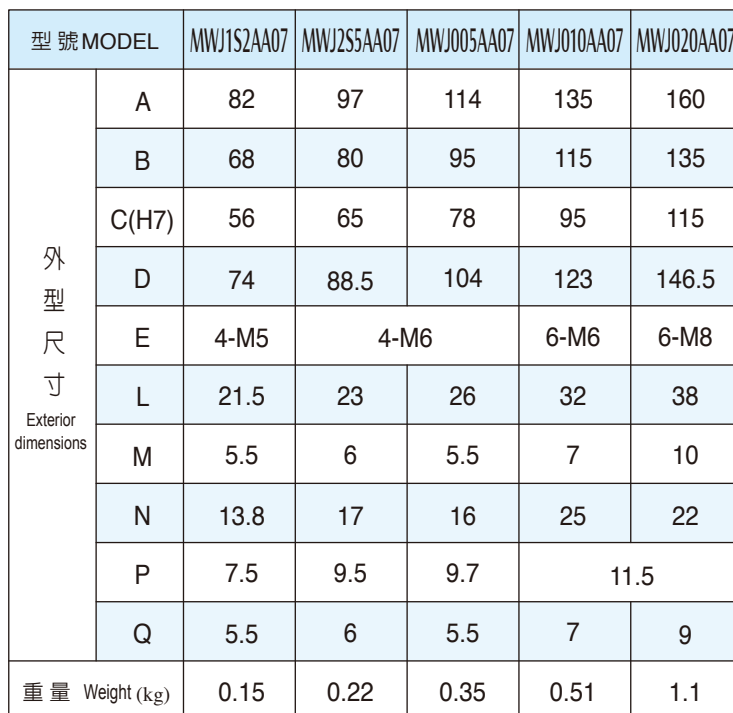

濕式多板離合器 Oil Actuated Multi-disc Electromagnetic Clutch

型 號 Model	動 扭 力 Dynamic Friction Torque (Nm)	靜 扭 力 Static Friction Torque kgm(Nm)	電 壓 (DC-V) Voltage	功 率 Power	最 高 轉 速 (rpm) Maximum number of turns	重 量 (kg) Weight
MWJ0S3AA	3.0	6	24V	18W	3500	1.0

